


REOTEMP All-Angle thermometer allows for easy temperature monitoring from any position.

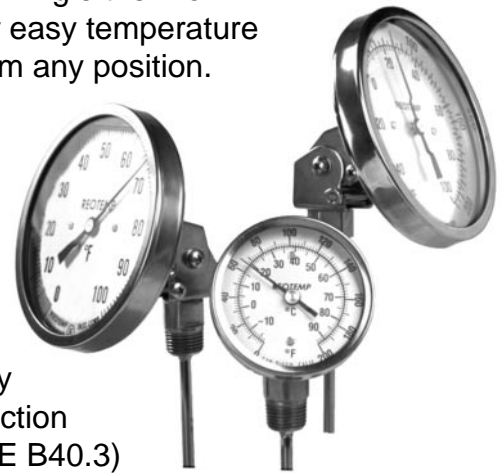

Standard Features

- Complete 180° Adjustability
- All Stainless Steel Construction
- Hermetically Sealed (ASME B40.3)
- Accurate to 1% of Full Scale
- Standard External Reset
- Silicone Fillable for Vibration
- 360° Case Rotation

How to Order

LL

060

1

F43

SF

Models	Stem Length	Connection	Temperature Ranges <small>See pg.13 for full list.</small>	Options
Standard Models		Standard Threaded	Fahrenheit Ranges	PS = Pointed Stem
LL = Model L (3" dial, reset)	025 = 2.5"	1 = 1/2" NPT (std.)	F23 -40 TO 160°F	SF = Silicone Fill (max temp 550°F)
	040 = 4"	5 = 3/4" NPT adapter	F55* 25 TO 125°F	SS = 316 SS Stem
MM = Model M (4" dial, reset)	060 = 6"	U = 1/2" NPT Union	F43 0 TO 200°F	S3 = 3/8" dia. Stem
	090 = 9"		F47 0 TO 250°F	PC = Acrylic Window
JJ = Model J (5" dial, reset)	120 = 12"		F63 50 TO 300°F	PY = Polycarbonate Window
	150 = 15"		F67 50 TO 500°F	TG = Tempered Glass Window
	180 = 18"		F69 50 TO 550°F	MM = Max/Min Pointer
	240 = 24"		F81 150 TO 750°F	CC = Certificate of Conformance
	300 = 30"		F85 200 TO 1000°F	C1 = 1 Point Calibration Cert.
	360 = 36"		Celsius Ranges	C3 = 3 Point Calibration Cert.
			C23 -40 TO 70°C	
			C55* 0 TO 50°C	
			C43 0 TO 100°C	
			C47 -20 TO 120°C	
			C59 10 TO 150°C	
			C67 10 TO 260°C	
			C69 10 TO 290°C	
			C81 50 TO 400°C	
			C85 100 TO 500°C	
			Dual F/C Ranges	
			D23 -40 TO 160°F & -40 TO 70°C	
			D55* 25 TO 125°F & -5 TO 50°C	
			D43 0 TO 200°F & -10 TO 90°C	
			D47 0 TO 250°F & -20 TO 120°C	
			D63 50 TO 300°F & 10 TO 150°C	
			D67 50 TO 500°F & 10 TO 260°C	
			D69 50 TO 550°F & 10 TO 290°C	
			D81 150 TO 750°F & 70 TO 400°C	
			D85 200 TO 1000°F & 100 TO 500°C	
			*- Not available in 2.5" stem.	
		Sanitary		
		For more information on Sanitary Thermometers see page 12		
	-Intermediate lengths available up to 80"			
	-Specify length in inches + tenths			For Thermowells see pg. 14