


#### Standard Features

- All Stainless Steel Construction
- Hermetically Sealed (ASME B40.3)
- Accurate to 1% of Full Scale
- Standard External Reset
- Silicone Fillable for Vibration

REOTEMP Angle Form thermometers are ideal for local, eye-level temperature readings in most process applications.

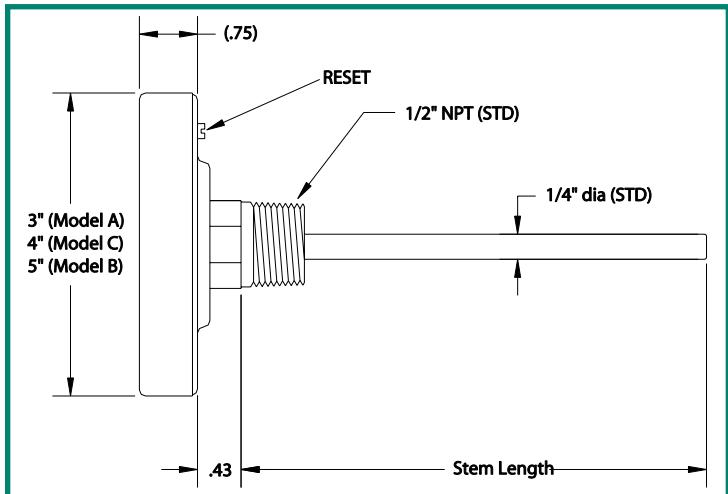

#### How to Order

AA

060

1

F43

SF

| Models                                  | Stem Length       | Connection  | Temperature Ranges<br>See pg.13 for full list.   | Options   |
|---|-------------------|---|--|---|
| <b>Standard Models</b>                  |                   | <b>Standard Threaded</b>  | <b>Fahrenheit Ranges</b>   |   |
| <b>AA</b> = Model A<br>(3" dial, reset) | <b>025</b> = 2.5" | <b>1</b> = 1/2" NPT (std.)                                      | <b>F23</b> -40 TO 160°F<br><b>F55*</b> 25 TO 125°F<br><b>F43</b> 0 TO 200°F<br><b>F47</b> 0 TO 250°F<br><b>F63</b> 50 TO 300°F<br><b>F67</b> 50 TO 500°F<br><b>F69</b> 50 TO 550°F<br><b>F81</b> 150 TO 750°F<br><b>F85</b> 200 TO 1000°F  | <b>PS</b> = Pointed Stem  |
| <b>BB</b> = Model B<br>(5" dial, reset) | <b>040</b> = 4"   | <b>4</b> = 1/4" NPT   | <b>C23</b> -40 TO 70°C<br><b>C55*</b> 0 TO 50°C<br><b>C43</b> 0 TO 100°C<br><b>C47</b> -20 TO 120°C<br><b>C59</b> 0 TO 150°C<br><b>C67</b> 0 TO 250°C<br><b>C69</b> 0 TO 300°C<br><b>C81</b> 50 TO 400°C<br><b>C85</b> 100 TO 500°C  | <b>SF</b> = Silicone Fill<br>(max temp 550°F)                                       |
| <b>CC</b> = Model C<br>(4" dial, reset) | <b>060</b> = 6"   | <b>5</b> = 3/4" NPT adapter                                     | <b>Dual F/C Ranges</b>   | <b>SS</b> = 316 SS Stem<br><b>S3</b> = 3/8" dia. Stem<br><b>PC</b> = Acrylic Window |
|   | <b>090</b> = 9"   | <b>X</b> = Plain Hex Bushing<br>(no threads)                    | <b>D23</b> -40 TO 160°F & -40 TO 70°C<br><b>D55*</b> 25 TO 125°F & -5 TO 50°C<br><b>D43</b> 0 TO 200°F & -10 TO 90°C<br><b>D47</b> 0 TO 250°F & -20 TO 120°C<br><b>D63</b> 50 TO 300°F & 10 TO 150°C<br><b>D67</b> 50 TO 500°F & 10 TO 260°C<br><b>D69</b> 50 TO 550°F & 10 TO 290°C<br><b>D81</b> 150 TO 750°F & 70 TO 400°C<br><b>D85</b> 200 TO 1000°F & 100 TO 500°C | <b>PY</b> = Polycarbonate<br>Window   |
|   | <b>120</b> = 12"  | <b>B</b> = 1/2" BSPT  |  | <b>TG</b> = Tempered Glass<br>Window  |
|   | <b>150</b> = 15"  |   |  | <b>MM</b> = Max/Min Pointer   |
|   | <b>180</b> = 18"  | <b>Sanitary</b>   |  | <b>CC</b> = Certificate of<br>Conformance   |
|   | <b>240</b> = 24"  |   |  | <b>C1</b> = 1 Point Calibration<br>Cert.  |
|   | <b>300</b> = 30"  |   |  | <b>C3</b> = 3 Point Calibration<br>Cert.  |
|   | <b>360</b> = 36"  |   |  | For Thermowells<br>see pg. 14   |
|   |                   | For more information on<br>Sanitary Thermometers<br>see page 12 |  |   |
|   |                   | -Intermediate<br>lengths available<br>up to 80"                 |  |   |
|   |                   | -Specify length in<br>inches + tenths                           |  |   |

\*- Not available in 2.5" stem.

## REOTEMP INSTRUMENT CORPORATION