


SILICON CARBIDE PROTECTION TUBES

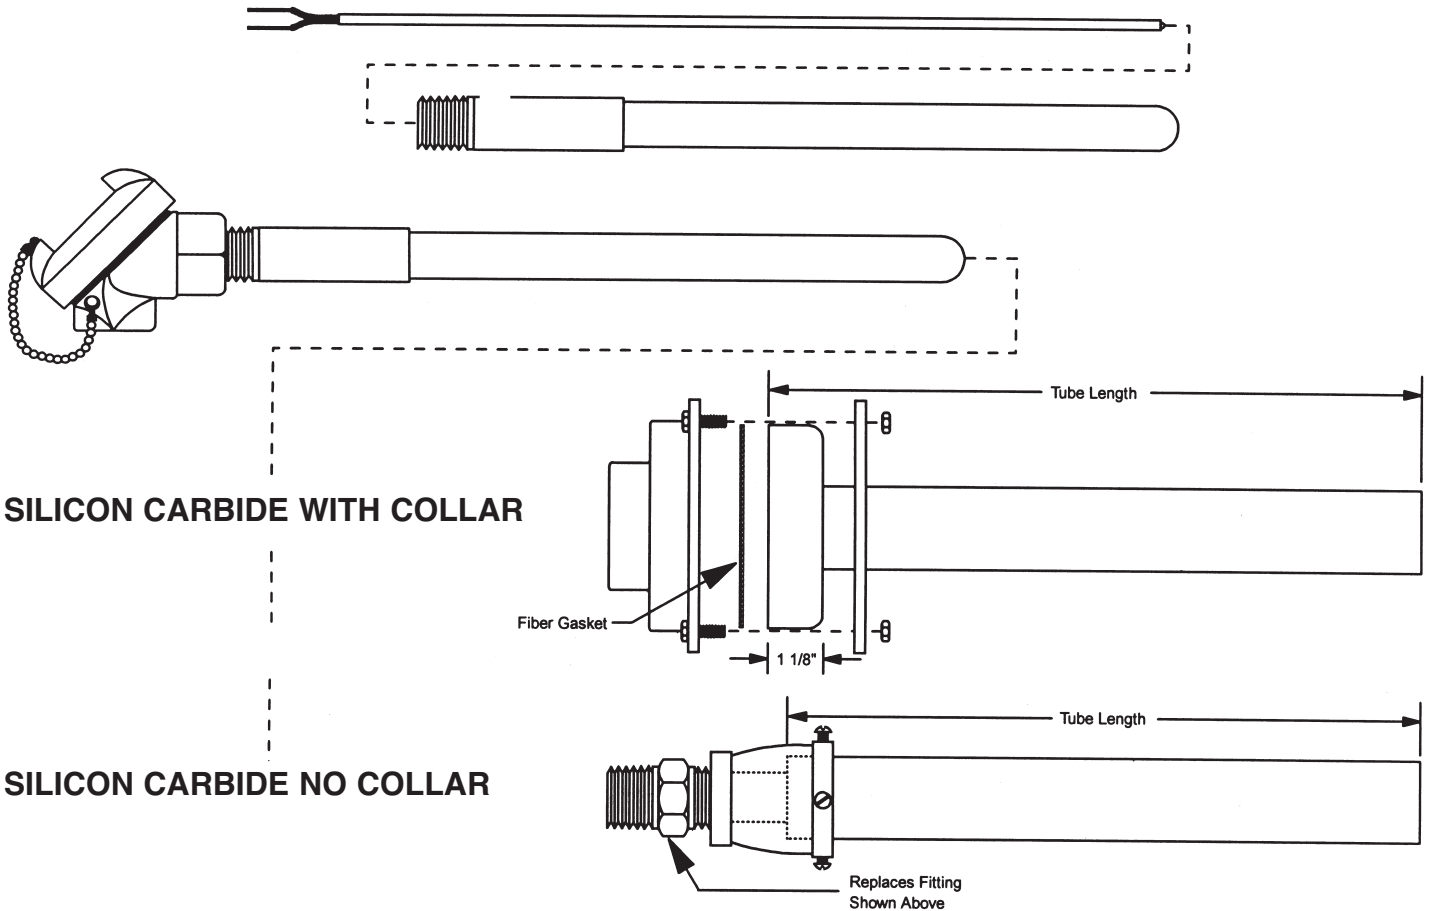

Connection Head: General purpose connection for non-hazardous locations.

Element: ANSI Calibration type R, S for service to 1482°C.

ANSI Calibration type B (non ANSI WR, W3, W5) for service to 1650°C.

Internal Protection Tube: Alumina (99.8% Al₂O₃) 11/16" O.D. x 7/16" I.D.

External Protection Tube: Silicon Carbide (SiC) 1 3/4" O.D. x 1" I.D., 1650°C maximum temperature.

TO ORDER: PT1

X

X

X

X

X

ISA Calibration
(X) = Sensor Not
Required

C	Complete Assembly
E	Element Only
I	Inner Tube Only
O	Outer Tube Only

Connection Head
Specify Model
from TC-9

CPT	With Collar
SPT	No Collar

Code	Lengths Available
12	12"
16	16"
18	18"
24	24"
30	30"
36	36"
42	42"
48	48"