


BREAK - TO - LENGTH RTD

Reduce inventory levels and costs by
consolidating sensor requirements.

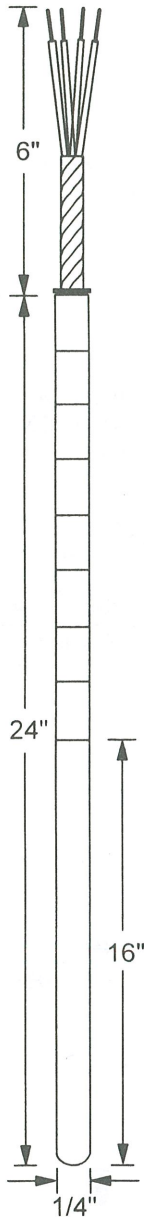


TO ORDER:

BTL - X - X -RTD

LT	204 °C Max
HT	482 °C Max

16	16" Length
24	24" Length

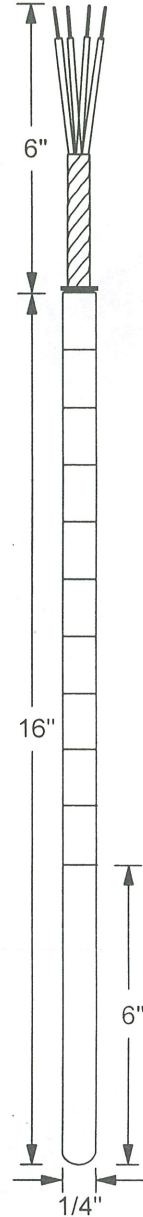

NOTE: ALSO AVAILABLE IN THERMOCOUPLE
SEE PAGE TC-15

STANDARD FEATURES :

- 100Ohm Platinum Element, +/- 0.1% @ 0°C, 0.00385 Ohm/Ohm/°C
- 316/L Stainless Steel Sheath
- Four Conductor, Teflon or Fibreglass Insulated and Jacketed Leads

The Break - To - Length sensor is designed as a quick replacement element for existing thermowell assemblies. Pre-scored at 1" increments, the sensor can be "broken" to fit most applications. A pair of pliers and a screw driver are the only tools required for the job. This unique design has no burrs or sharp edges. For added protection the sensors come with a grommet that slips over the leads and fits into the tubing.

Shown here are our most common sensors available from stock. Please contact us to discuss options required to suit your specific needs.