


## BAYONET STYLE THERMOCOUPLES


MODEL PT




MODEL PT90

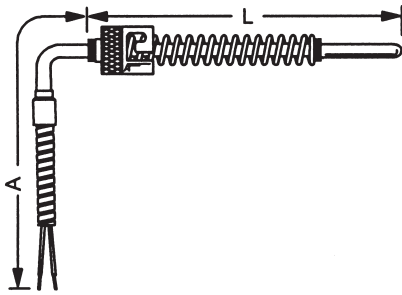

MODEL PT45

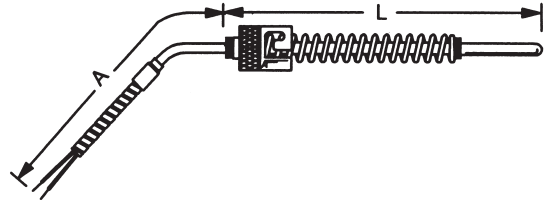

MODEL PTSA (Locking nut travels on coiled spring)

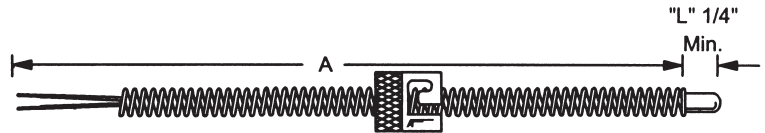


MODEL PTAF (Locking nut travels on flex armour)



### FEATURES

PROBE: 3/16" O.D., 316SS Sheath.  
LEADS: 20 AWG Fiberglass with SS Armour.

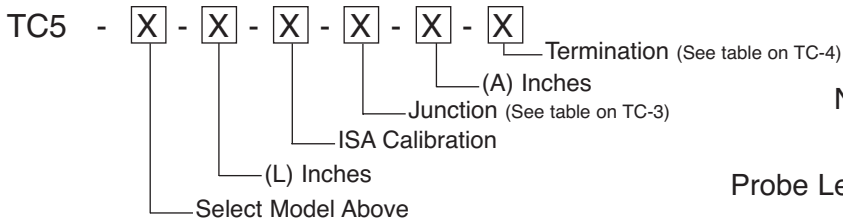


### ORDERING

NOTE: When ordering probes for known hole depths;

Probe Length = Hole Depth + Adapter Length + 1/2"

### STANDARD ADAPTER


TC5SA - A - X

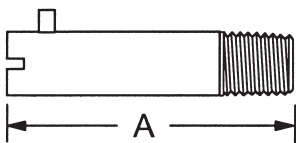

18	1/8" NPT
38	3/8" NF

1	7/8"
2	1 3/8"
( )	Specify in Inches


### PIPE CLAMP ADAPTER

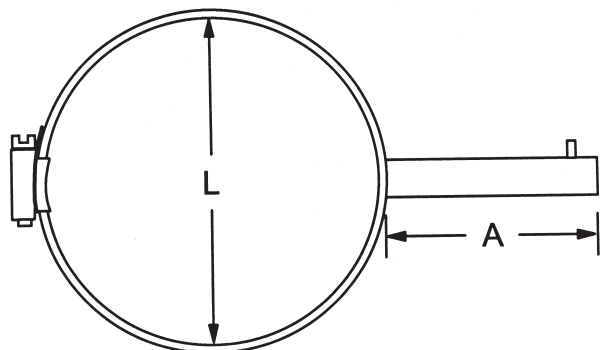

TC5PC - X - X

- (L) Pipe Diameter
- (A) Inches

### OIL SEAL ADAPTER

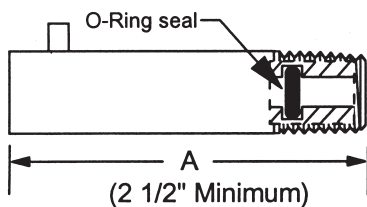

TC5OS - X

- (A) Inches